



## HAILO S100 PROFILOT

3-section aluminium combination ladder with LOT System for level adjustment.

### THE KEY FEATURES


- LOT System: compensates for uneven ground up to 15 cm, adjusted by pedal
- Versatile to use as a lean-to, extending or trestle ladder
- 2 attachable full surface-contact feet and 2 large stable claw feet



---

### OTHER PRODUCT ADVANTAGES

- Locking hook with transport locking mechanism
- Length and cross-profiled rungs
- With step adjustment option (9306-507 / 9309-507)
- Non-removable third ladder section (9312-507)
- Max. load capacity 150kg

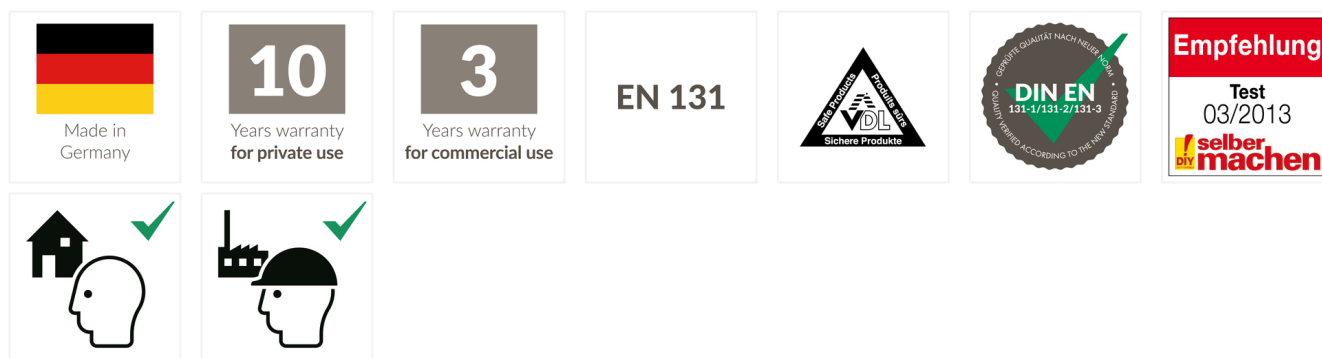

## SPECIFICATIONS

|                                                       |  |                        |
|-------------------------------------------------------|--|------------------------|
| Level of equipment                                    |  | 5                      |
| LOT System                                            |  | ✓                      |
| Locking hook with transport locking mechanism         |  | ✓                      |
| Can be used as lean-to ladder or free-standing ladder |  | ✓                      |
| Can be used in a free-standing position               |  | ✓                      |
| Can be used as lean-to ladder                         |  | ✓                      |
| Step adjustment                                       |  | ✓                      |
| Number of rungs                                       |  | 2 x 9 + 1 x 8          |
| Width/depth required for setting up lean-to ladder    |  | A = 122 cm, B = 151 cm |
| Width/depth required for setting up extending ladder  |  | A = 122 cm, B = 169 cm |
| Height of lean-to ladder                              |  | 562 cm                 |
| Height of extending ladder                            |  | 421 cm                 |



|                                         |                                                                                     |                                  |
|-----------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|
| Max. working height                     |                                                                                     | 658 cm                           |
| Max. working height of trestle ladder   |    | 358 cm                           |
| Max. working height of lean-to ladder   |    | 658 cm                           |
| Max. working height of extending ladder |    | 465 cm                           |
| Dimensions of packaging (HxWxD)         |    | A = 274 cm, B = 48 cm, C = 19 cm |
| Step adjustment max.                    |   | 54 cm                            |
| Weight                                  |  | 21,7 kg                          |
| Load capacity                           |  | 150 kg                           |